

# CLASSIC LD-C-50™

OPEN CELL SPRAY FOAM




Providing Low  
Density and  
High Yield



Contact: Pacific Urethanes  
Call: 1300 736 963  
Email: [sprayfoam@pacificurethanes.com](mailto:sprayfoam@pacificurethanes.com)



**HUNTSMAN**  
BUILDING SOLUTIONS

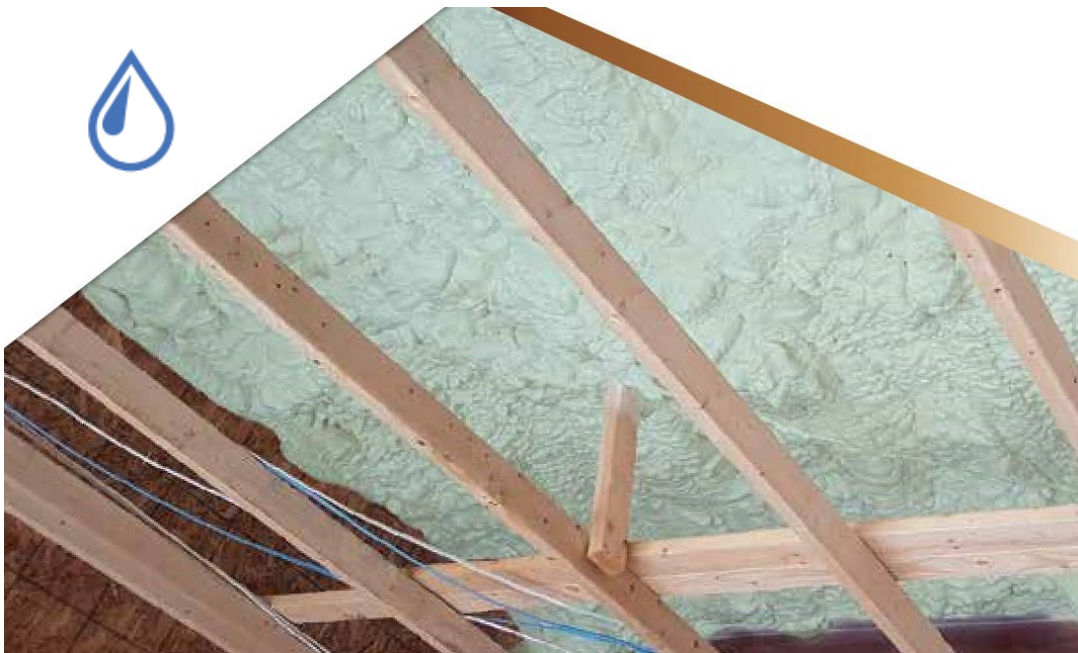

Classic LD-C-50 is a High Yield OC spray applied foam when installed following application guidelines, adheres tenaciously to framing members and substrates. Classic LD-C-50 is a low density, open celled, flexible, 100% water-blown polyurethane foam insulation. It is capable of being installed in wall cavities, roof assemblies (interior), attics, floor assemblies and ceiling assemblies.

Classic LD-C-50 forms a completely sealed air barrier in wall cavities and can be used to fill stud wall construction in a single application or any critical insulation areas. Its performance is superior to commonly used fiber-glass batt or blown-in insulation. It adheres well to most building materials and will provide a continuous barrier against air infiltration for the life of the building. As a component of a "systems" approach to proper building envelope construction in both residential and commercial construction, Classic LD-C-50 provides exceptional performance in reducing heat transfer.

## PRODUCT FEATURES

- Excellent adhesion and cohesion
- Low density & high yield
- New construction and retrofit applications
- Codemark certified.

R-value	R-1.3 @ 50mm R-3.9 @ 150mm
Density	8.7 kg/m <sup>3</sup>
AS1530.3	18 / 0 / 1 / 7

## WARRANTY

When installed properly in accordance with instructions, the company warrants that the properties of the product meet product specifications as outlined in the technical data sheet. Save and except any exclusions referenced in the warranty.