

**WATERPROOFING
SOLUTIONS**



COATLOK® WPS
WATERPROOFING SYSTEM

COATLOK® WPS WATERPROOFING SOLUTIONS



To achieve a high-performing and durable waterproofing system. This waterproofing system is a 2-component assembly where our Coatlok® U-192 membrane is installed directly on top of our Icynene® HFO 200 spray foam or a suitable concrete primer. Coatlok® U-192 is a non-toxic, rapid hardening product that can be applied on practically any shape to create a monolithic waterproofing membrane. Our new Coatlok® WPS waterproofing solution has a UL Evaluation Report (UL ER39727-01) to confirm that it both meets the requirements of AC29 - Acceptance Criteria for Cold, Liquid-Applied, Below-Grade, Exterior Dampproofing and Waterproofing Materials and that it also complies with the International Building Code and International Residential Code.

PRODUCT BENEFITS

- Application on vertical, horizontal and slanted surfaces.
- Covers new or existing surfaces*
**surface preparation could be required*
- High thermal stability (to cold and heat)
- Highly resilient
- Icynene® HFO 200 can be applied at various thicknesses, to meet R-value requirements.
- Seamless install
- Fast install time
- 100% system-bond to substrate, no joints, no mechanical fixation, no penetration.




InSeal Right™ (QIA) Quality Installation Assurance Program

Installation quality under the InSeal Right™ program supports optimal product performance and demonstrates the commitment of the contractor to deliver quality installs.



2 PATHS TO SUCCESS

Coatlok® WPS Path 1

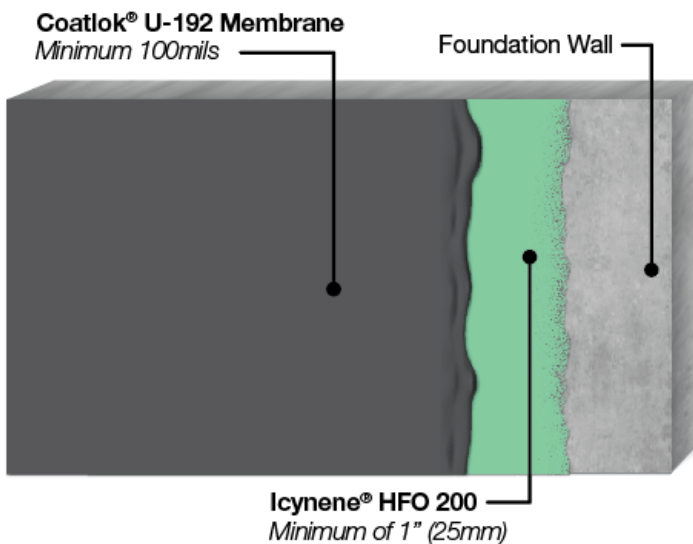

PSI	Head Feet	UL Solutions ER39727-01
23	53 ft.	COATLOK® U-192 over Icynene® HFO 200

Coatlok® WPS Path 2

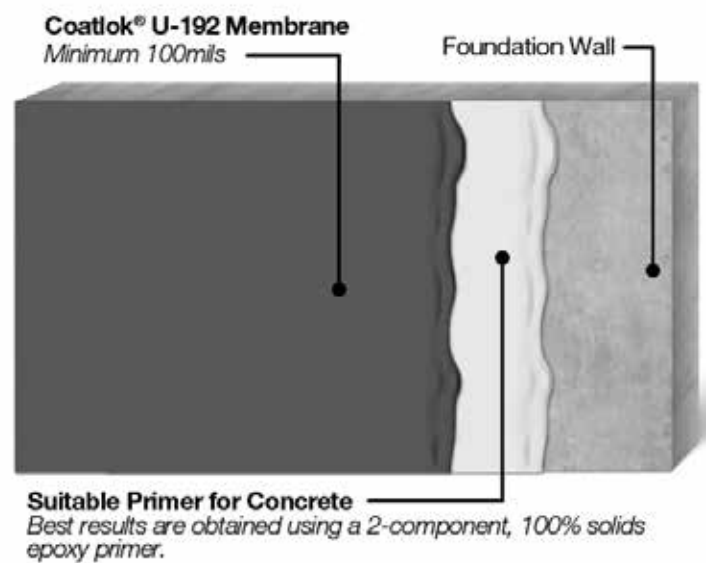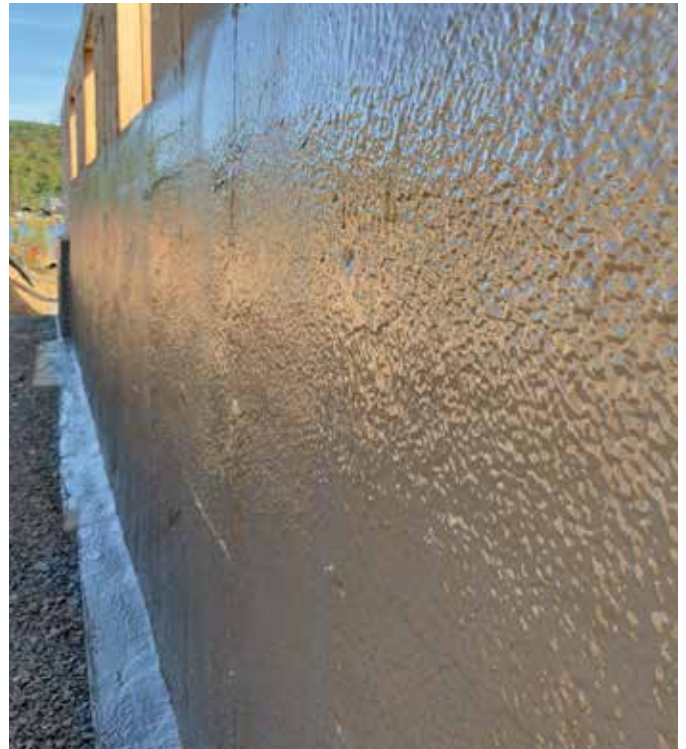

PSI	Head Feet	UL Solutions ER39727-01
50	115 ft.	COATLOK® U-192 over a suitable concrete primer



HUNTSMAN

BUILDING SOLUTIONS

3315 E Division St.
Arlington, TX 76011
Phone: (817) 640-4900
www.huntsmanbuildingsolutions.com

AN: 24.00222 | REV: 10.14.25

